




**RECLAIM**  
ENERGY

# Plumbing for FlowSmart + Reclaim CO2 heat pump cylinder

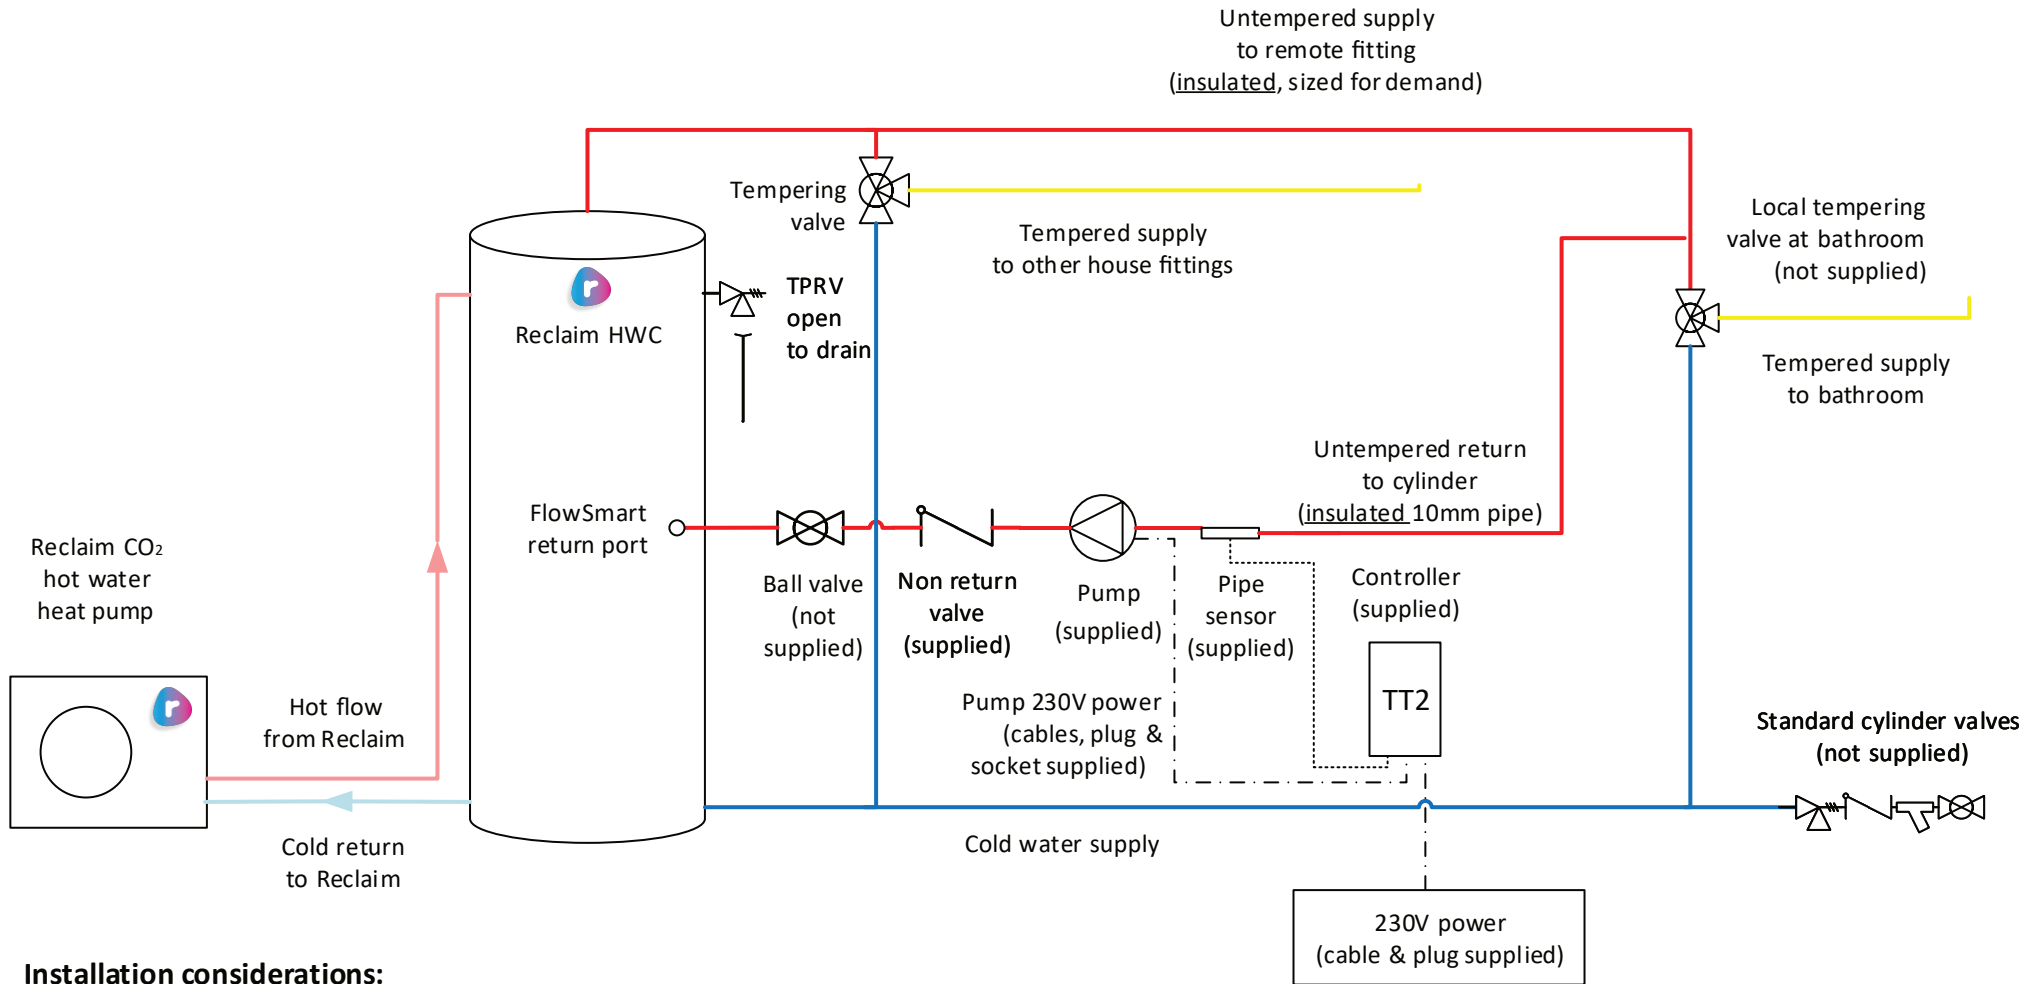

## Installation considerations:

- Plumber to provide additional tempering valve, ball valve, pipework and any plumbing fittings required
- Controller requires standard 230V socket near middle of cylinder
- Pipe sensor must be underneath insulation and well secured to pipework

**Savings · Sustainability · Independence**

[www.ecohotwater.co.nz](http://www.ecohotwater.co.nz)

07 312 3382

## Installation with Reclaim CO2 hot water heat pump:

Installation of FlowSmart must be to Reclaim hot water cylinder with dedicated return port for FlowSmart